


80/L Automatic In Line Sleeve Wrapping Machine




Features include:

- Space saving mono block construction
- Kissing conveyors with variable speed drive for smooth product transfer on unstable products
- Top and bottom powered film feed
- Pneumatic pack clamp
- Galvanised mesh belt tunnel conveyor

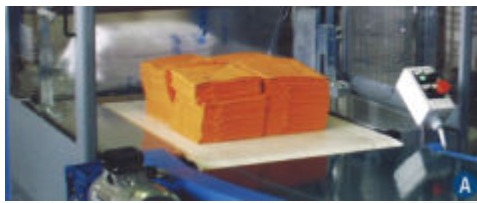

Collation of four stacks of table napkins, automatically in-fed (A)

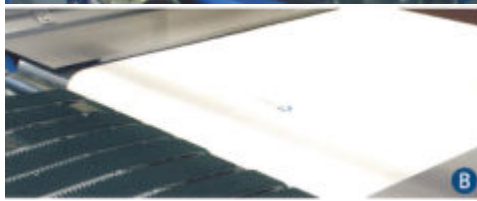


A special "kissing conveyor belt" allows light and flexible products to travel over the sealing bar, without deforming, and catching in the machine (B & C).



Sontex

Sontex (Machinery) Ltd
61 Westgate, Cleckheaton, West Yorkshire BD19 5JZ
Telephone: 01274 872299 Fax: 01274 862829
Email: info@sontex.co.uk www.sontex.co.uk
Reg. London England. Reg. No. 684985. Reg. Office as above

TECHNICAL DATA

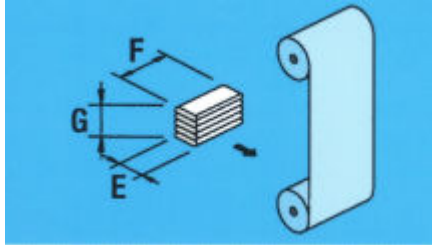

Available dimensions:

E = min. 200—max 750mm

F = min 100—max 580mm

G = min 50—max 370mm

Max available $F + 2G$ —max 800

SPECIFICATION	
Conveyor belt speeds controlled by variable speed motor and gearboxes	2,5-12 m per min.
Film Thickness	30-100 micron
Max width of film reel	800mm
Max diameter of reel	350mm
Compressed air consumption (6 bar)	8,2 NI/cycle
Power Consumption	9-10 Kw/h

